

\Orchestrating a brighter world

NEC

Less shadow and glare give you more flexibility to engage with your audience.


UM351W UM361X



The UM Series allows you to enjoy great performance and flexibility with its range of advanced features

Ultra short Throw Projection that is Optimal for Classrooms and Meeting Areas

Thanks to the ultra short throw lens, the UM351W can project a 100" diagonal image from only 31" (the distance from the edge of the projector to the screen is only 17 inches). Shadows do not easily form even when someone stands in front of the projector, making it suitable for classrooms, small meeting areas, shop windows, and a wide variety of other locations if installed on the wall or the ceiling.

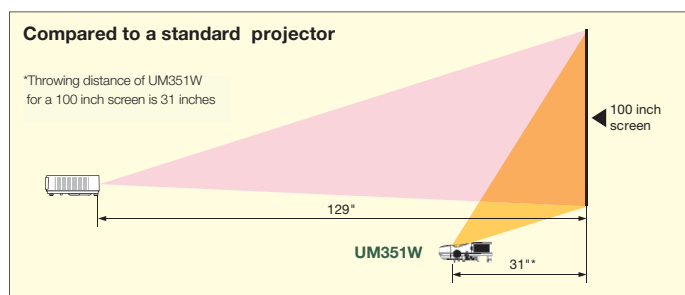

A Light Output of 3,600 ANSI lumens*, the Highest in its Category

Projects a sharp image even in bright rooms thanks to its light output of 3,600 ANSI lumens, the best performance in its category.

*1: When ECO mode off is selected in UM361X

Accessory Cable Cover

A cover is included to protect connected devices and hide unsightly cables.



Optional Interactive Solutions

Pen and touch interactive capabilities can be added to UM Series projectors. The NP03Wi kit includes two pens and a camera module for at the board control of the computer and on-screen annotations.

The NP01TM touch module provides touch based interactive control and annotations.




Table Projection

For unique applications, projecting images onto a table, floor or ceiling is possible.



20 W Speaker is powerful enough for use in large rooms

A built-in monaural speaker with powerful 20 W output provides excellent sound even in classrooms and conference rooms. This projector also comes with a microphone input, allowing your voice to be projected via the internal speaker.



Get Connected with a Wide Selection of Inputs and Outputs advanced features

USB Display Function

Using a commercially available USB cable (compatible with USB 2.0 specifications) to connect the computer with the projector allows you to send your computer screen image and sound to the projector without the need of traditional computer cables.

USB Viewer

This series projector can deliver a solution when you would prefer to leave your laptop computer behind for a presentation. Simply place your file onto a USB drive and plug it into the projector's USB port. This allows you to display images stored as JPEGs from optional USB storage

DisplayNote


A DisplayNote for NEC license with 5 connections is provided with UM projector purchases. DisplayNote includes an on-screen tool bar that enables colorful annotations over any program. Teachers can use a tablet to view content, control the host computer and make on-screen annotations - this allows teachers to step away from the whiteboard to assist students. Students can view and share content from their devices, can make annotations and save files to review after class. For whole class collaboration, an optional multi-user license with cloud based connectivity is available.



Multi-screen Projection Function*

The multi-screen projection function allows you to view screens from multiple devices. Display information from up to 16 PCs, tablet PCs, smart phones, and other network connected devices on a multi-screen display of up to 16 screens. Easily share screens and information regardless of device or operating system.

* Requires an optional wireless LAN module for wireless connection. PCs require the installation of the Image Express Utility Lite software from the included CD-ROM. Smart phones and tablets require the download and installation of our Wireless Image Utility app.

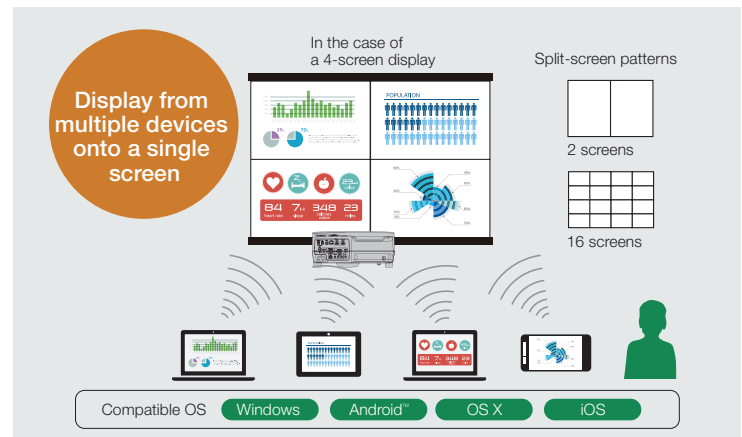

NaViSet Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control functionality for a majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.



Virtual Remote Tool

The utility software Virtual Remote Tool included on the supplied NEC Projector CD-ROM can display the Virtual Remote (or toolbar) on your computer screen. This allows you to turn the projector power on or off and select signals from a computer display cable (VGA), serial cable, or LAN connection.



Other Networking Capabilities

- Simple Access Point
- PC Control Utility 4.0 for Windows
- PC Control Utility 5.0 for Mac
- CRESTRON ROOMVIEW™ with emergency function
- AMX BEACON
- HTTP server
- PJLink

Other Useful Features and Functions

- Equipped with a high-performance filter to provide superior dust-proofing
- Auto power-on via the HDMI 1, HDMI 2 and COMPUTER input terminals when a signal is detected from a computer
- Sleep timer can be set to automatically turn off the projector at set countdown times
- Low power consumption (0.4 W in 240 V AC stand-by mode) minimizes energy costs
- The carbon meter lets you check the amount of CO₂ you reduced by using ECO Mode

- Intuitive plug and play setup and operation
- PC-based geometric correction and 3D Reform™ function
- Includes a remote with the control ID registration function, which allows operation of multiple projectors with a single remote
- Wall color correction for vivid images even without a screen
- DICOM simulation
- Security bar / Kensington lock / Control panel lock and password lock



UM351W

3,500 ANSI lumens

WXGA

5.6 kg


UM361X

3,600 ANSI lumens

XGA

5.6_k

Terminals

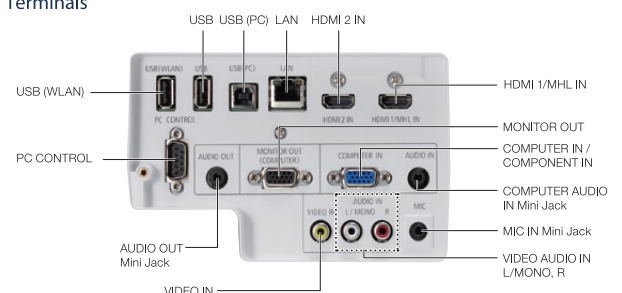

WARRANTY

Registered owners receive a 2 year parts (excluding consumables) and labor warranty including the first year of InstaCare. InstaCare provides the original owner one year of either limited 3 business day repair/return or next business day exchange.

IN THE BOX

Remote control, batteries, power cord, user's manual on CD-ROM, quick start guide, product registration card.

ACCESSORIES

SCP200	Suspended ceiling plate
NP05LM1	802.11b/g/n wireless LAN adapter
NP04WK	Wall mount
NP01TK	Table top mount
NP01UCM	Universal ceiling mount
SCP200	Lightweight adjustable suspended ceiling plate for use with NEC ceiling mounts
NP33LP	Replacement lamp
NP02Pi	Interactive stylus pen
RMT-PJ36	Replacement remote control
SC200	Security cable for connection to projector
ADP-CV1E	Component video to D-sub 15-pin adapter
NECEW1-MP	Extends term of parts and labor warranty to 3 years
NECEW2-MP	Extends term of parts and labor warranty to 4 years
ADVEXON1-MP	Extends term of InstaCare service program to 2 years
ADVEXON2-MP	Extends term of InstaCare service program to 3 years

ORDERING MODEL NUMBERS

NP-UM361X	XGA projector
NP-UM361X-WK	XGA projector with wall mount
NP-UM361Xi-WK	XGA projector, wall mount and interactive pen module
NP-UM361Xi-TM	XGA projector, wall mount, interactive pen module and touch module
NP-UM351W	WXGA projector
NP-UM351W-WK	WXGA projector with wall mount
NP-UM351Wi-WK	WXGA projector, wall mount and interactive pen module
NP-UM351Wi-TM	WXGA projector, wall mount, interactive pen module and touch module

		NP-UM351W	NP-UM361X
Display Technology		0.59 inch LCD with MLA	0.63 inch LCD with MLA
Native Resolution		WXGA 1280 x 800	XGA 1024 x 768
Lens		Manual Focus F=1.80, f=4.78mm, Throw Ratio 0.36:1, zoom 1 - 1.4	
Light source (Lamp)	ECO mode	160 W	160 W
	Normal ECO mode	200 W	200 W
	ECO mode off	255 W	255 W
Lamp life	ECO mode	6,000 H	6,000 H
	Normal ECO mode	5,000 H	5,000 H
	ECO mode off	3,800 H	3,800 H
Filter life		Same as lamp life	
Image size		58 to 110 inches	61.5 to 116.6 inches
Light output	ECO mode off	3,500 ANSI lumens	3,600 ANSI lumens
	Normal ECO mode	Approx. 80% of ECO off	
	ECO mode	Approx. 60% of ECO off	
Contrast ratio (white / black)		4,000:1 with Iris	6,000:1 with Iris
Maximum input resolution		Up to WUXGA (1920 x 1200) with Advanced AccuBlend	
Scan rate	Horizontal	15 kHz to 100 kHz (RGB: 24 kHz or over)	
	Vertical	50 Hz to 120 Hz	
Keystone correction	Horizontal	Manual : ± Max 10 degrees	
	Vertical	Manual : ± Max 10 degrees	
Supported Video Standards		NTSC, NTSC4.43, PAL, PAL-M, PAL-N, PAL 60, SECAM, 480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
PC Signal Compatibility		VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, UXGA	
Input Terminals	Computer	Mini D-sub 15 pin x 1 (component video using ADP-CV1E adapter)	
	Audio	Stereo mini jack x 1	
		RCA x 1	
	Video	(L/R) RCA x 1	
	HDMI	HDMI x 2 (1 with MHL)	
Output terminals	MIC	Mini jack x 1	
	Audio	Mini D-sub 15 pin x 1 Stereo mini jack x 1	
Wired LAN port		RJ-45 (10BASE-T / 100BASE-TX) x 1	
Wireless LAN port		Yes (USB type A)	
External Control		RS232, IR, Wired LAN, Wireless LAN (optional), USB	
Sync Compatibility		Separate Sync / Composite Sync / Sync on G	
USB port (for USB display)		Type A x 1, (type B x 1)	
Built-in speaker		20 W monaural	
Usage environment	Operational temperature	5°C to 40°C, 20% to 80% humidity (no condensation) (ECO MODE) is set automatically to [ON] at 35°C to 40°C	
	Storage temperature	-10°C to 50°C, 20% to 80% humidity (no condensation)	
Power requirement		100 - 240V / AC, 50/60Hz	
Input current		3.8 A to 1.6 A	
Power consumption (100 to 130 V AC / 200 to 240 V AC)	ECO mode off	337 W / 324 W	
	Normal ECO mode	265 W / 257 W	
	ECO mode	221 W / 214 W	
	Standby (Network)	2.1 W / 2.4 W	
	Standby (Normal)	0.2 W / 0.4 W	
Installation Orientation		Table/Front, Table/Rear, Ceiling/Front, Ceiling/Rear	
Projector Dimensions (W x H x D)		378 x 160 x 428mm (14.9" x 6.3" x 16.9")	
Weight		5.6kg / 12.4lbs	
Carton Dimensions (W x H x D)		591 x 259 x 491 mm (23.3" x 10.2" x 19.4")	
Gross weight		8.6kg / 19lbs	
Accessories		Power cord, remote control, batteries, cable cover, signal cable, CD-ROM (User's manual / Utility software), Quick setup guide, Important information, security sticker	

OPTIONS



Replacement lamp
NP33LP (for UM351W / UM361X)



Wall mount kit
NP04WK



Table projection unit
NP01TK



Interactive unit
NP03Wi



Stylus pen
NP02Pi



Wireless LAN module
NP05LM1



3D Reform, Advanced AccuBlend, AutoSense and ECO Mode are trademarks of NEC Display Solutions. HDMI, the HDMI Logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names are trademarks or registered trademarks of their respective holders. Product specifications subject to change.

©2015 NEC Display Solutions of America, Inc. and the NEC logo are registered trademarks of NEC.

Cat.No. 25.NEC.80.GL.UN.182 | Rev. 02.17.2016

www.necdisplay.com